



ZEISS Victory Diarange M 3-12x56 T*



KEY FEATURES:

- Rifle scope with integrated laser rangefinder (eye safe, laser class 1).
- Large measuring range from 10 yds to 999 yds.
- High measuring accuracy: ± 1 yd up to 600 yds and ± 0.5 % of reading at ranges beyond 600 yds
- Very short measuring time = 0.5 sec.
- Simple, fast operation.
- Outstanding performance and high low-light capability.
- High mechanical sturdiness as well as recoil proof, water tight and nitrogen-filled.
- Four different illuminated reticles for use in lowlight conditions.
- Lowest subtension resulting from reticle in the 2nd image plane.
- Mounting achieved through rail type system.


Carl Zeiss Optical Inc. 13005 N. Kingston Ave. Chester, VA 23836 1-800-441-3005

www.zeiss.com/sports

Diarange M 3-12x56 T*	
Technical and Optical Specifications	
Magnification	3 12 x
Objective lens diameter (mm)	56
Twilight factor	8.5 25.9
Eye relief (mm) Eye relief (in)	90 3.5
Field of view (ft/100 yds)	37.5 10.5
Exit pupil diameter (mm)	14.7 4.7
Length (mm) Length (in)	360 14.17
Center tube diameter (mm)	30
Objective tube diameter (mm)	62
Weight (g) Weight (oz)	995 35.09
Windage and Elevation Adjustment – 1 Click at 100 meters	1 cm (1/3 MOA)
Maximum Elevation at 100 yards (inches)	55
Maximum Windage at 100 yards (inches)	39
Reticles (All Illuminated)	60 - 66 -70 -77
Waterproof	according DIN 58390-80-03
Temperature Function	-13 F° until 122 F°
Diopter adjustment	+2 dpt / -4 dpt
Parallax free (yards)	100

Diarange M 3-12x56 T*	
Laser Rangefinder Specifications	
Battery	CR 123 A (3V)
Laser	Class I / 904 nm
Measuring Range (yards)	10 yds to 999 yds
Accuracy	Up to 600 yds - +/- 1 yd Over 600 yds +/- .05% of reading
Smallest Object That can be measured	19.7" at 328 yds
Duration of Measurement	Maximum of .5 seconds
Time between measurement (pulse)	3 seconds
Number of Measurements at +20 C /-30 C	>5,000/>700
Display Brightness	Manually Adjustable
Length of Display	3 seconds
Low Battery indicator	Yes (blinks)

Controls

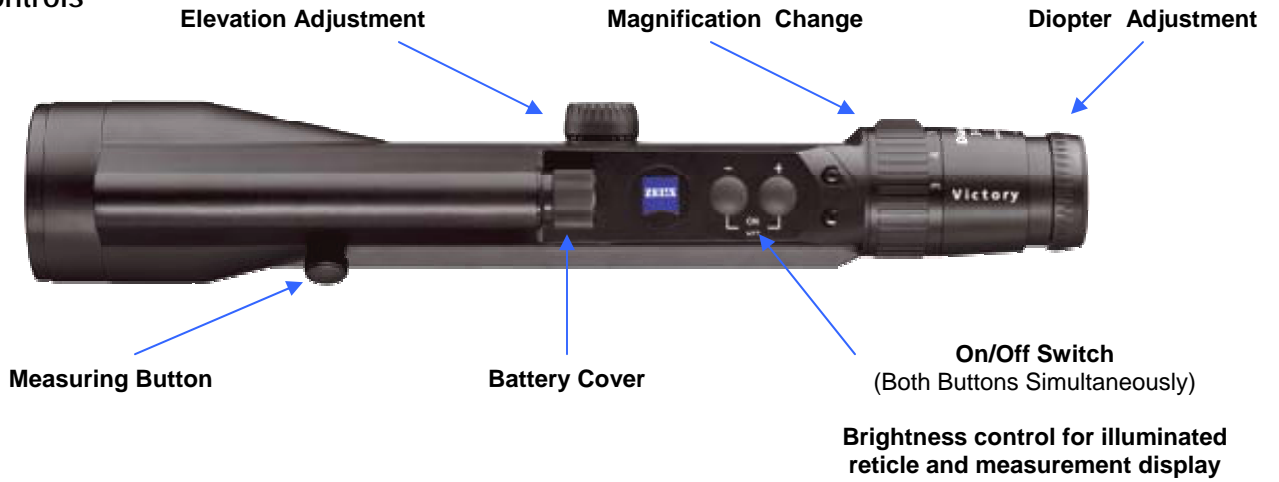

Reticles Available

